Dimensions and ordering information - security door locking system
3-point locking system M2
5-point locking system M4

Standard version 60

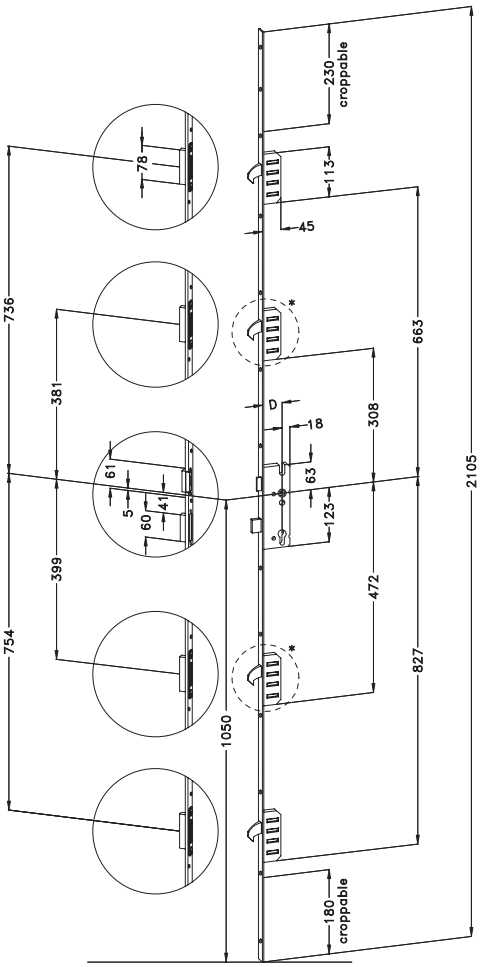

*optionally with 4 hooks (M4)

Technical specifications of the keeps:

Type of keep:
❑ Single keep
❑ Keep rail (continuous) / Extension keep set (split)

Profile system:
❑ Timber 4 mm ❑ Timber 11 mm
❑ PVCu/Vinyl ❑ Aluminum ❑ Steel
Manufacturer: _____
Frame number: _____
Sash number: _____

Technical specifications of the lock:

Type of faceplate:
Flat faceplate: ❑ 16 x 3 mm
❑ 20 x 3 mm
❑ 24 x 3 mm
U-faceplate: ❑ 22 x 6 mm*
❑ 22 x 8 mm*
❑ 24 x 6 mm
❑ 24 x 8 mm**
*only in backsets 30, 35 and 40 available
**only in backsets 28, 30, 35, 40 and 45 mm available

Backsets for handle center 92:
❑ 26 ❑ 28 ❑ 30
❑ 35 ❑ 40 ❑ 45
❑ 50 ❑ 55 ❑ 60
❑ 65

Backsets for handle center 72:
❑ 55*** ❑ 60*** ❑ 65***
***only in type of faceplate F16 and F20 available

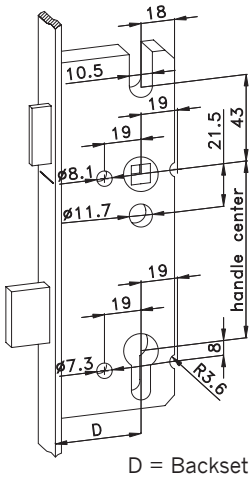

D = Backset

Size of the spindle:
❑ 8 mm ❑ 10 mm

Number of hooks:
❑ M2 (2 hooks) ❑ M4 (4 hooks)

Faceplate surfaces:
❑ matt chrome-plated/silver ❑ grey powder-coated

DIN direction:
❑ left ❑ right ❑ universal

Additional dimensions/informations:
Rear backset: 18 mm
Thickness of the lock housing: 15,5 mm

Quantity: _____