Dimensions and ordering information - security door locking system
Multi-point locking system with eccentric cams R4
Multi-point locking system with eccentric cams/mushroom heads RT4

Standard version 60

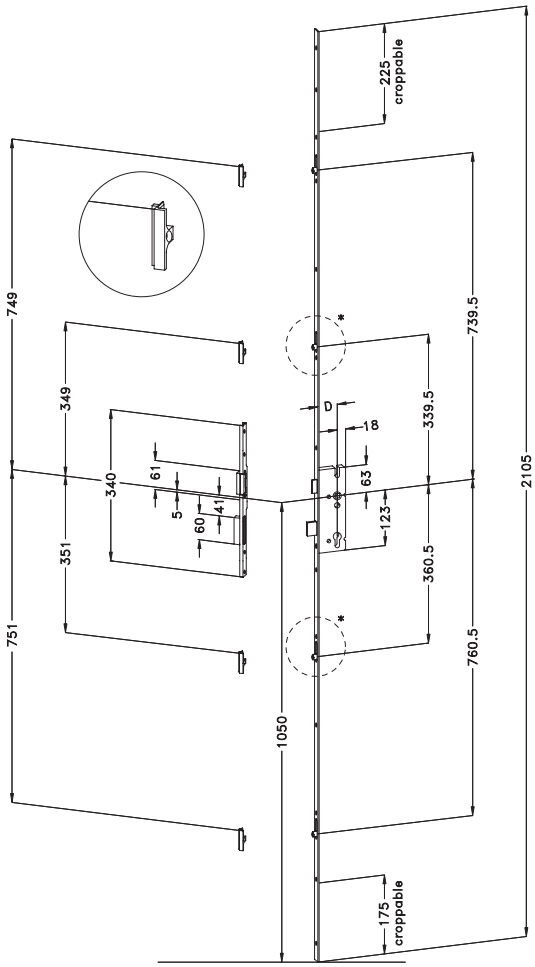

*optionally as RT4 (2 eccentric cams + 2 mushroom heads)

Technical specifications of the keeps:

Type of keep:

❑ Single keep eccentric cam (4 pieces)

❑ Single keep eccentric cam (2 pcs.) + mushroom head (2 pcs.)

Profile system:

❑ Timber 4 mm ❑ Timber 11 mm

❑ PVCu/Vinyl ❑ Aluminum ❑ Steel

Manufacturer: _____

Frame number: _____

Sash number: _____

Technical specifications of the lock:

Type of faceplate:

Flat faceplate: ❑ 16 x 3 mm
❑ 20 x 3 mm
❑ 24 x 3 mm

U-faceplate: ❑ 24 x 6 mm

Backsets for handle center 92:

❑ 26 ❑ 28 ❑ 30
❑ 35 ❑ 40 ❑ 45
❑ 50 ❑ 55 ❑ 60
❑ 65 ❑ 70 ❑ 80

Backsets for handle center 72:

❑ 55*

*only in type of faceplate F16 and F20 available

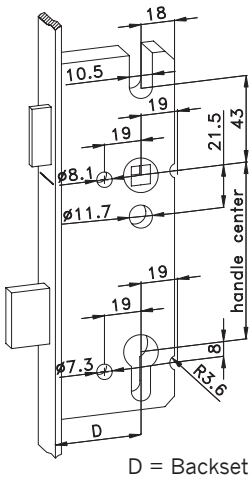

D = Backset

Size of the spindle:

❑ 8 mm ❑ 10 mm

Type of locking:

❑ R4 (4 eccentric cams)

❑ RT4 (2 eccentric cams + 2 mushroom heads)

Faceplate surfaces:

❑ matt chrome-plated/silver ❑ grey powder-coated

DIN direction:

❑ universal

Additional dimensions/informations:

Rear backset: 18 mm

Thickness of the lock housing: 15,5 mm

Quantity: _____