

tilt and clap

HAUTAU PRIMAT

... and the upward possibilities of your imagination are open!



HAUTAU

HAUTAU PRIMAT
manages distance lightly.
Its secret: elegance and
technical refinement.



The fittings and design
of the elegant lever convince:
all visible parts are made of
light alloy. The handle surface
is ergonomically formed, the
shape is modern and super-flat.



The features

Versatility
is trumps

HAUTAU PRIMAT opens, closes and secures tilt-windows made of timber, metal and plastic - with up to 40 kg/m² glass weight. Round and flat arches, slants, double and triple constructions, ledges and opening variants are no problem for the fanlight opener. For an opening width of 190 mm. The compact, finely-shaped housing is made of light alloy, the functional parts are made of highly corrosion-protected steel.

Heat insulation
or mounting
included

Because of strict regard to heat insulation regulations the three-point locking in the opening stay increases the window closing pressure. Because of this it closes very tightly. Mounting and adjustment can be made quickly. The sash closing pressure can be adjusted on the sash block. And in the open position? The fixing is stormproof!

Everything
up there under
control

A few turns of the elegant crank linkage positions the fanlight as required. Perceptibly convenient is the spindle mechanism with high-grade brass bearing under the cover profile. Alternatively a swivel lever, lockable hand lever, hand lever with transmission or motor drive can be chosen.

Flexible shape

The curves of round or flat-arch windows take up the flexible linkage harmoniously. It is available in various colours, is especially light moving and is suitable for transmission in one and two-stay systems. Even in the smallest radius it works precisely and reliably. For windows with slants stainless, pliable spring band steel corner brackets provide a reliable solution. Chain guides bring two and three-sash windows to the exact position.

With a swing
outwards

HAUTAU PRIMAT-A opens windows outwards. It provides for openings from 130 to 170 mm. For possible jump-backs of the window there are three sash blocks of 0 - 75 mm. Here also the sash closing pressure is adjustable.

Functional
security
at a high level


An optional Allen screw prevents unauthorised release of the stays. The anti-dirt profiling provides for trouble-free running. For sash heights over 300 mm additional locks ZV/F (without visible fittings) are available. They improve the sealing of the sash and provide increased protection against burglary. This corresponds to the high demands of SKG*, SHR* and WK2. As an option an electronic closure control can be added.





That what pleases
is allowed.

HAUTAU PRIMAT has a
suitable solution for every
fanlight shape. Whether
round, oval or rectangular
the system opens as desired
inwards or outwards, one
or two-sash tilt-windows, flat
arches, round arches etc.
etc. etc. ...

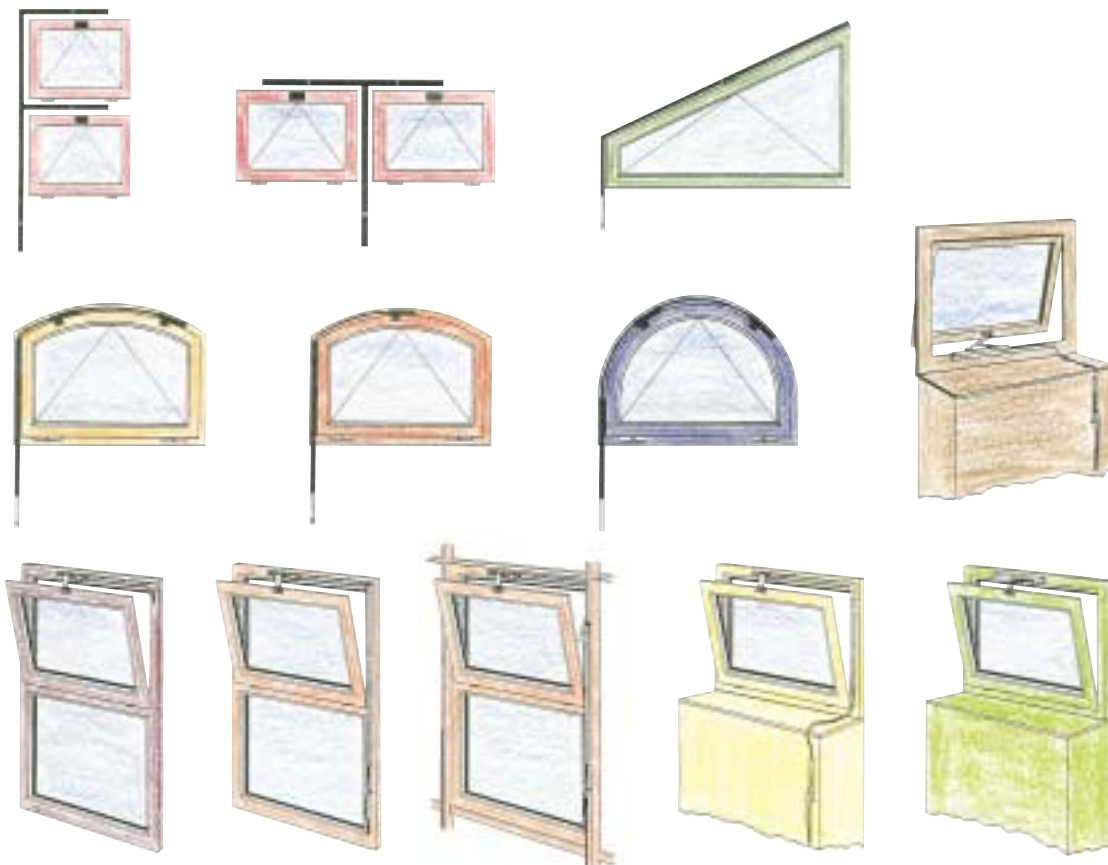

Would you like
detailed information about
HAUTAU PRIMAT or other
HAUTAU products?
Just ask us and we will convince you!

You can reach us via the Internet
under www.HAUTAU.de



W. HAUTAU GmbH
PO Box 1151
D 31689 Helpsen
Tel +49 57 24 / 393-0
Fax +49 57 24 / 393-138
Info@HAUTAU.de

You'll notice if it's HAUTAU.



HAUTAU