
TURN HINGE BRACKET DL.K.20-13.LS.WS 2903203

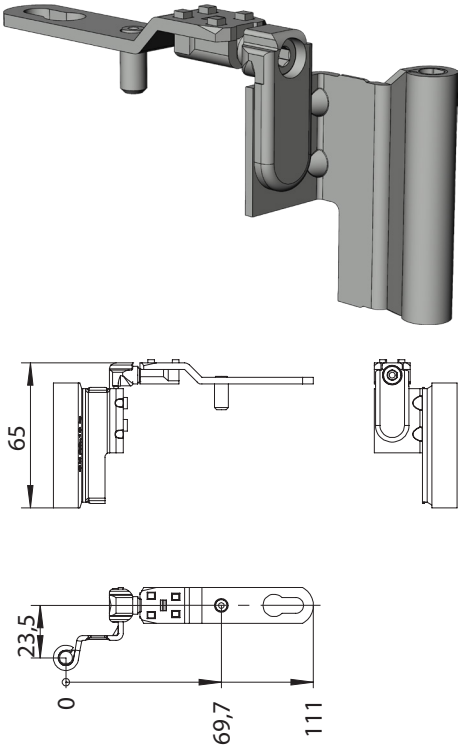

Specifikation	
Type of component	Pivoting hinge
	aluminium, PVC
Airgap	12 mm
Sash overlap	20 mm
	13 mm
Mounting side	DIN left
visibility	surface-mounted
Opening type / switch sequence	Turn
Colour	silver
surface	galvanised
Colour hinge side	white (similar to RAL 9016)
Surface hinge side	powdered
Hinge side design	activPilot Concept K
sash weight	100 kg
Sash weight - FFB up to 1.1 m	130 kg
Turn Restriction	yes
Post connector	no
Packaging	Reusable

Note

For the intended use, please take into account the information from the fitting lists, mounting instructions and application diagrams.All rights and modificactions are reserved.

TURN HINGE BRACKET DL.K.20-13.LS.WS 2903203

Legend

Max. permissible sash weight	This value specifies the maximum sash weight for which the window fitting system is approved. However, other parameters must be taken into account in order to determine the final permissible sash sizes. For this purpose, the respective application diagram from the product catalogue must be consulted.
Max. permitted sash weight up to 1.1 m sash rebate width	This value specifies the maximum sash weight for which the fitting system is approved for window elements with a maximum sash rebate width of 1.1 m. However, other parameters must be taken into account in order to determine the final permissible sash sizes. For this purpose, the respective application diagram from the product catalogue must be consulted.
Surface hinge side	**Powder coated** The paint powder is sprayed onto the surfaces and then baked and melted at 160 – 200 °C. This ensures very high corrosion resistance and a visually appealing surface.