
SHEAR SK2.20-13.RS.WS
2858684

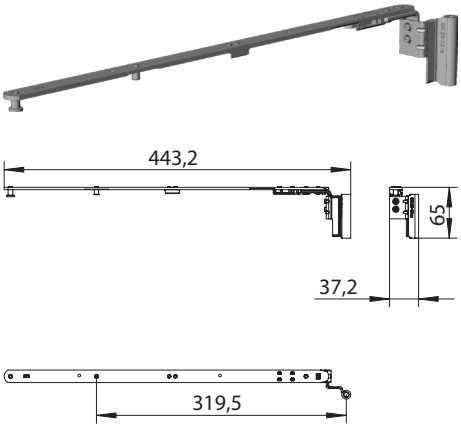

Specifikation	
Component type	Shear
	aluminium, PVC-U
	13 mm
Airgap	12 mm
Sash overlap	20 mm
Mounting side	DIN right
Visibility	Surface-Mounted
Opening type / switch sequence	Turn-tilt, Closed-Turn-Parallel op.
Colour	silver
Surface	galvanised
Colour hinge side	white (similar to RAL 9016)
Surface hinge side	powdered
Hinge side design	activPilot Concept K
Sash weight	130 kg
Turn Restriction	yes
Pull-in device	no
Shear size	2
	140 mm
Opening angle	180 °
Packaging	Reusable

Note

For the intended use, please take into account the information from the fitting lists, mounting instructions and application diagrams.All rights and modificactions are reserved.

SHEAR SK2.20-13.RS.WS
2858684

Legend

Max. permissible sash weight	This value specifies the maximum sash weight for which the window fitting system is approved. However, other parameters must be taken into account in order to determine the final permissible sash sizes. For this purpose, the respective application diagram from the product catalogue must be consulted.
Surface hinge side	**Powder coated** The paint powder is sprayed onto the surfaces and then baked and melted at 160 – 200 °C. This ensures very high corrosion resistance and a visually appealing surface.